

Threading Tools

Catalogue

Turning

2022



ZCC Cutting Tools Europe GmbH

your Partner | your Value



WELCOME TO ZCC CUTTING TOOLS EUROPE

ZCC-CT, one of the World's leading carbide tooling manufacturers, welcomes you to its products. We are able to offer you a wide product range of high performance cutting tools at economic prices and a good supply service to support the production and productivity at your manufacturing facilities. You will find the main tool types in the various sections of the catalogue, Turning is in section A, Milling in section B and Drilling in section C of the catalogue.

We are looking forward to working with you and developing good cooperation together. Our team at ZCC Cutting Tools Europe is ready to support you in all of your requirements.



Member of Minmetals Group



EUROPEAN HEADQUARTER / HAUPTSITZ IN EUROPA:

ZCC Cutting Tools GmbH, Heltorfer Str.12, 40472 Düsseldorf, Germany

Tel.: +49 (0) 211/989240-0, Fax: +49 (0) 211/ 989240-111

E-Mail: info@zccct-europe.com, www.zccct-europe.com, www.zccct.com





Contents

A Turning A1-A333

General turning tools

A21-A246

Parting and grooving tools

A247-A290

Threading tools


A291-A325





6series

- *ISO metric thread*
- *General pitch thread*
- *Whitworth thread*
- *Unified thread*
- *British standard pipe thread*
- *American standard pipe thread*

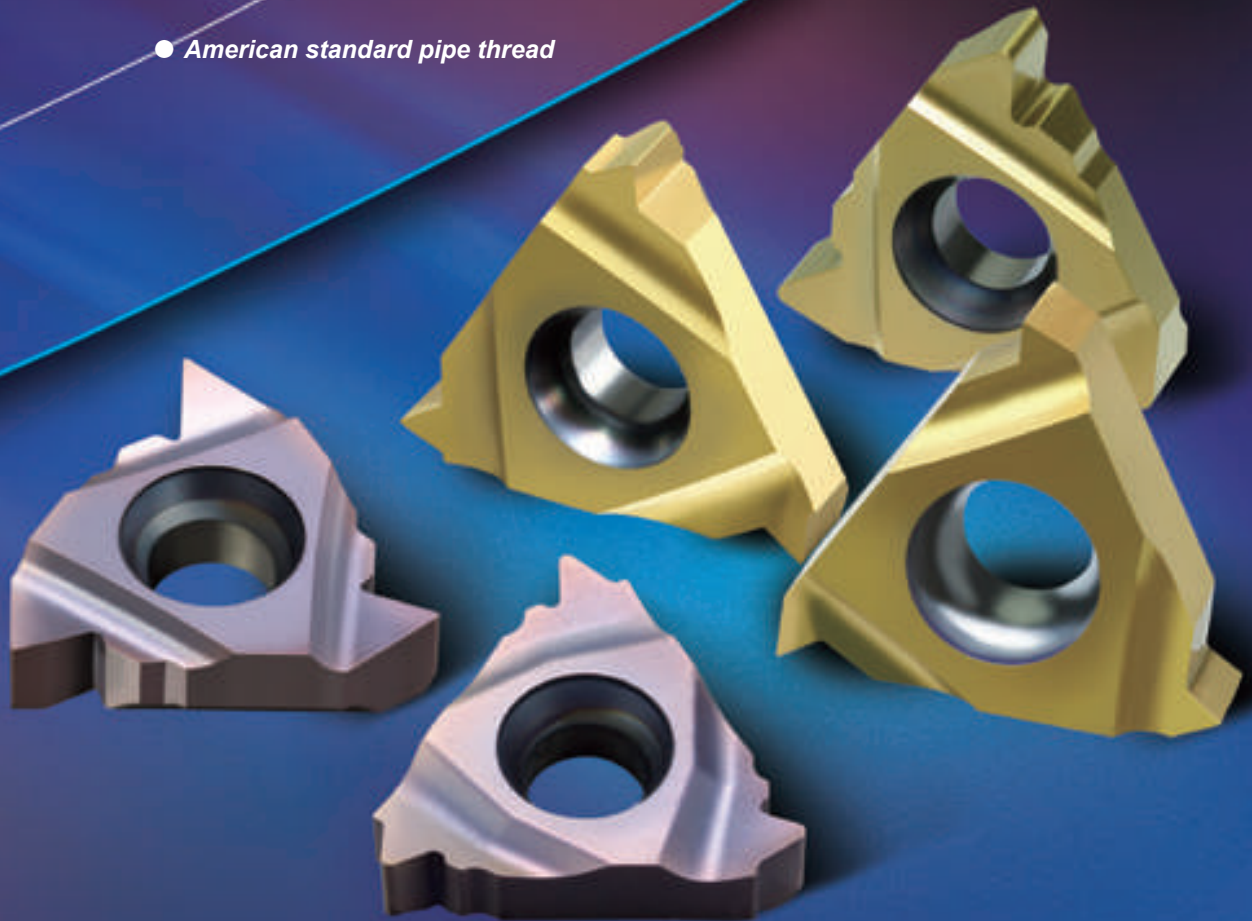

Threading insert

Fully ground high precision inserts for high quality, high precision threading in a variety of materials e.g. steel, stainless steel, hard-to-machine materials.

Turning



Guide to selecting turning tools	A2-A5
Turning inserts overview	A6-A11
Turning tool holders overview	A12-A14
Recommended grade overview for turning insert	A19
General turning tools	A21-A246
General turning inserts overview	A22-A26
Application instruction of general turning tools	A27-A49
General turning inserts	A50-A152
Cemented carbide and cermet inserts	A54-A114
PCBN&PCD inserts	A115-A149
Ceramic inserts	A150-A152
General turning tools	A153-A240
Tool holders for external turning	A156-A205
Tool holders for internal turning	A206-A240
Application reference for general turning machining	A241-A246
Parting and grooving tools	A247-A290
Parting and grooving tools overview	A250-A252
Parting and grooving inserts	A253-A269
Parting and grooving tools	A270-A288
Application reference for parting and grooving	A289-A290
Threading tools	A291-A325
Threading tools overview	A294-A295
Threading inserts	A296-A311
Threading tools	A312-A314
Application reference for threading	A315-A325
General technical information for turning	A326-A333

TURNING Threading Tools

How to select threading tools

How to select threading tools

Structure of threading tools selected table

- Categorized as external threading and internal threading according to machining type.
- Separately listed out according to series.

Dimensions of product

Indicating external threading or internal threading

Threading insert type Including type, standard, tolerance class

Diagram of thread pitch

External threading tools

ISO metric thread (with end)

Product specification Including type (right hand and left hand), basic dimensions, stock

Product specification Including type (right hand and left hand), basic dimensions, applicable inserts, spare parts

Dimension diagram of insert

Type	Stock	Basic dimensions(mm)					Applicable inserts	Inserts screw	Shim	Shim screw	Wrench	
		a	h	b	L	s						
ZSER	1616H16	▲	16	16	16	100	20	Z16ER□□□□	80 M3.5X12T	MT16-□□MN	SM4X8C	WT15P
	2020K16	▲	20	20	20	125	25					
	2525M16	▲	25	25	25	150	32					
	3225P16	▲	32	32	25	170	32					
	3232P16	▲	32	32	32	170	40					
	2525M22	▲	25	25	25	150	32					
	3225P22	▲	32	32	25	170	32					
ZSEL	1616H16	▲	16	16	16	100	20	Z16EL□□□□	80 M3.5X12T	MT16-□□MN	SM4X8C	WT15P
	2020K16	▲	20	20	20	125	25					
	2525M16	▲	25	25	25	150	32					
	3225P16	▲	32	32	25	170	32					
	3232P16	▲	32	32	32	170	40					
	2525M22	▲	25	25	25	150	32					
	3225P22	▲	32	32	25	170	32					
3232P22	▲	32	32	32	170	40						
4040S22	△	40	40	40	250	50	Z22EL□□□□	W0 M5X17	MT22-□□MN	SM5X8.5	WT20P	
4040S22	△	40	40	40	250	50						

▲ Stock available △ Make-to-order

Type	Basic dimensions(mm)					Recommended coating grade	
	Pitch	S	Ø1.C	ed	Ød	YBG203	YBG205
The right hand tools	The left hand tools						
Z16ER0.SISO	Z16EL0.SISO	0.50	3.52	9.525	4.0	★	○
Z16ER0.75ISO	Z16EL0.75ISO	0.75	3.52	9.525	4.0	★	○
Z16ER1.0ISO	Z16EL1.0ISO	1.00	3.52	9.525	4.0	★	○
Z16ER1.25ISO	Z16EL1.25ISO	1.25	3.52	9.525	4.0	★	○
Z16ER1.5ISO	Z16EL1.5ISO	1.50	3.52	9.525	4.0	★	○
Z16ER1.75ISO	Z16EL1.75ISO	1.75	3.52	9.525	4.0	★	○
Z16ER2.0ISO	Z16EL2.0ISO	2.00	3.52	9.525	4.0	★	○
Z16ER2.5ISO	Z16EL2.5ISO	2.50	3.52	9.525	4.0	★	○
Z16ER3.0ISO	Z16EL3.0ISO	3.00	3.52	9.525	4.0	★	○
Z22ER3.SISO	Z22EL3.SISO	3.50	4.65	12.7	5.0	★	○
Z22ER4.SISO	Z22EL4.SISO	4.00	4.65	12.7	5.0	★	○
Z22ER4.5ISO	Z22EL4.5ISO	4.50	4.65	12.7	5.0	★	○
Z22ER5.0ISO	Z22EL5.0ISO	5.00	4.65	12.7	5.0	★	○
Z22ER5.5ISO	Z22EL5.5ISO	5.50	4.65	12.7	5.0	★	○
Z22ER6.0ISO	Z22EL6.0ISO	6.00	4.65	12.7	5.0	★	○


★ Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order



TURNING



Threading Tools

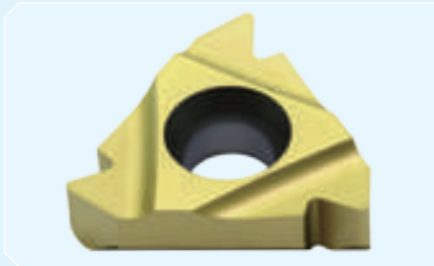

Threading tools overview	•	A294-A295
Introduction on threading insert grade and chipbreaker	•	A296
Threading insert	•	A297-A304
Thin Threading insert code key		A297
Thin ISO metric external thread		A298-A299
Thin General pitch thread		A300
Thin Whitworth thread		A301
Thin Unified thread		A302
Thin British standard pipe thread		A303
Thin American standard pipe thread		A304
Thin threading insert code key		A305
Thin ISO metric external thread		A306
Thin general pitch thread		A307
Thin Whitworth thread		A308
Thin unified thread		A309
Thin British standard pipe thread		A310
Thin American standard pipe thread		A311
Threading tools	•	A312-A314
Threading tools code key		A312
External threading tools		A313
Internal threading tools		A314
Application information on threading	•	A315-A325

A TURNING Threading Tools

Threading tools overview

General turning
Parting and grooving
Threading

Threading tools overview

Applications		For general use			
Legend					
Thread name		ISO metric thread With end	General pitch thread Without end	General pitch thread Without end	
Profil		GM	60	55	
Shape of insert (length: 11, 16, 22mm)		R style shown 	R style shown 	R style shown 	
Tool holder		Pitch/mm	Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)	
External thread	 R-type shown A313	16 × 16 × 100 20 × 20 × 125 25 × 25 × 150 32 × 25 × 170 32 × 32 × 170 40 × 40 × 250	0.5~6.0	0.5~5.0 (5~48)	0.5~5.0 (5~48)
	 R-type shown A314	16 × 125 × 12 16 × 150 × 16 16 × 150 × 20 20 × 150 × 25 20 × 180 × 25 25 × 150 × 32 32 × 200 × 40 32 × 250 × 40 40 × 300 × 50 50 × 350 × 63	0.5~6.0	0.5~5.0 (5~48)	0.5~5.0 (5~48)



For general use	For aerospace industry	Heater, gas and water pipe thread	For gas and water faucet and pipe connection
Whitworth thread	Unified thread (American standard threads)	British standard taper pipe threads	American standard taper pipe threads
W	UN	BSPT	NPT
R style shown	R style shown	R style shown	R style shown
<p>A301</p>	<p>A302</p>	<p>A303</p>	<p>A304</p>
Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)	Pitch/mm (pitch/Inch)
8~19	8~24	11~28	8~27
8~19	8~24	11~28	8~27

General turning

Parting and grooving

Threading

Threading tools overview

suitable for threading in a variety of materials


New nano coating grade

YBG203

- Specially treated edge for superior surface quality
- Sharp nose with small cutting resistance and superior performance
- Full ground inserts with high dimensional precision for high quality threading

Theoretical thread profile	Thread type	Grade of tolerance
		ISO metric thread
Whitworth thread W		Medium Class A
British standard pipe thread		Standard BSPT
Unified thread		2A/2B
American standard pipe thread		Standard NPT


- New nano coating grade specially designed for threading with longer insert life

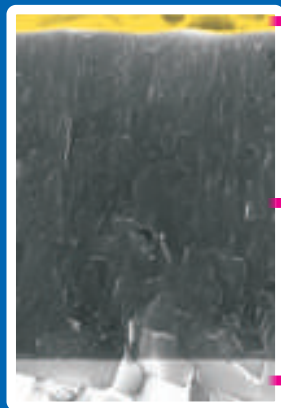

Advanced surface treatment techniques effectively reduce friction and allows for better wear observation.

Advanced TiAlN substrate nano coating, in combination with proper coating ingredients, improves the mechanical and thermal properties of coating.

Further optimizing coating structure, improving coating stress, enhancing bond strength of coating and substrate.

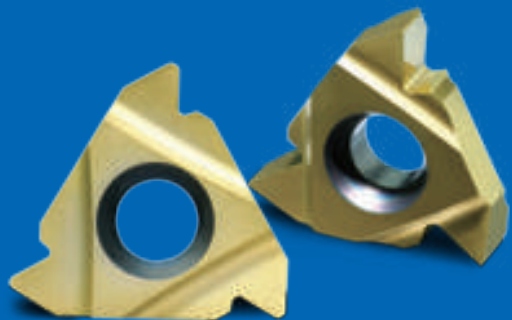

A 296




Case:

Workpiece material: 42CrMo(HB260)

Insert: Z16ER2.0ISO/YBG203

Thread pitch: $p=2.0\text{mm}$

Cutting data: $V_c=120\text{ m/min}$

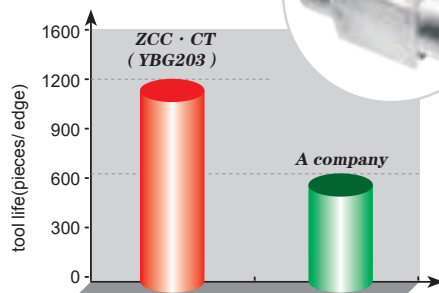

84% tool life improvement of ZCC·CT product than that of company A under the same cutting condition.



Threading inserts code key

General turning
Parting and grooving
Threading
Threading insert

Insert size	
Code	Diameter of IC(mm)
Z11	ø6.35
Z16	ø9.525
Z22	ø12.7

Cutting style	
E	-External threading inserts
I	-Internal threading inserts

Cutting direction	
R	-Right
L	-Left

Z16 E R 2.0 ISO (PP)

Screw pitch		
Full profile (Range of screw pitch is indicated by numbers).		
mm	TPI	
0.5-6.0	48-5	
V profile (Range of screw pitch is indicated by letters).		
	mm	TPI
A	0.5-1.5	48-16
AG	0.5-3.0	48-8
G	1.75-3.0	14-8
N	3.5-5.0	7-5
Thread specification	Range of thread pitch	
ISO metric thread	0.5-6.0	
General pitch thread	0.5-5.0	
Whitworth thread W	8-19	
British standard pipe thread	11-28	
Unified thread	8-24	
American standard pipe thread	8-27	

Profile	
ISO	—ISO metric 60° thread
60	—60° general pitch thread
55	—55° general pitch thread
W	—Whitworth thread
UN	—Unified thread(American standard threads)
BSPT	—British standard taper pipe thread
NPT	—American standard taper pipe thread



Chip breaker	
□	—fully ground edge insert
PP	—3-Dimensional chip-breaking insert

A TURNING Threading Tools


Threading insert

ISO metric thread (with end)

ISO 965-1980 DIN 13
GB/T 197-2003 Tolerance class: 6g/6H

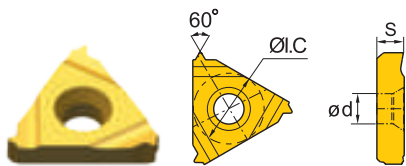

R type

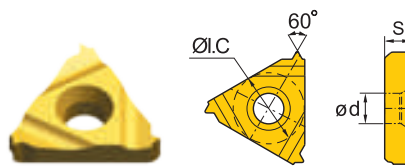

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER0.5ISO	Z16EL0.5ISO	0.50	3.52	9.525	4.0	★	○
	Z16ER0.75ISO	Z16EL0.75ISO	0.75	3.52	9.525	4.0	★	○
	Z16ER1.0ISO	Z16EL1.0ISO	1.00	3.52	9.525	4.0	★	○
	Z16ER1.25ISO	Z16EL1.25ISO	1.25	3.52	9.525	4.0	★	○
	Z16ER1.5ISO	Z16EL1.5ISO	1.50	3.52	9.525	4.0	★	○
	Z16ER1.75ISO	Z16EL1.75ISO	1.75	3.52	9.525	4.0	★	○
	Z16ER2.0ISO	Z16EL2.0ISO	2.00	3.52	9.525	4.0	★	○
	Z16ER2.5ISO	Z16EL2.5ISO	2.50	3.52	9.525	4.0	★	○
	Z16ER3.0ISO	Z16EL3.0ISO	3.00	3.52	9.525	4.0	★	○
	Z22ER3.5ISO	Z22EL3.5ISO	3.50	4.65	12.7	5.0	★	○
	Z22ER4.0ISO	Z22EL4.0ISO	4.00	4.65	12.7	5.0	★	○
	Z22ER4.5ISO	Z22EL4.5ISO	4.50	4.65	12.7	5.0	★	○
	Z22ER5.0ISO	Z22EL5.0ISO	5.00	4.65	12.7	5.0	★	○
	Z22ER5.5ISO	Z22EL5.5ISO	5.50	4.65	12.7	5.0	★	○
	Z22ER6.0ISO	Z22EL6.0ISO	6.00	4.65	12.7	5.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



General turning
Parting and grooving
Threading

Threading insert




ISO metric thread (with end)

ISO 965-1980 DIN 13
GB/T 197-2003 Tolerance class: 6g/6H

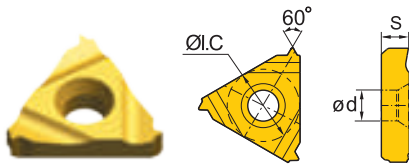

R type

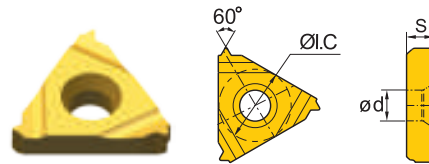

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z111R0.5ISO	Z111L0.5ISO	0.50	3.05	6.35	3.2	★	○
	Z111R0.75ISO	Z111L0.75ISO	0.75	3.05	6.35	3.2	★	○
	Z111R1.0ISO	Z111L1.0ISO	1.00	3.05	6.35	3.2	★	○
	Z111R1.25ISO	Z111L1.25ISO	1.25	3.05	6.35	3.2	★	○
	Z111R1.5ISO	Z111L1.5ISO	1.50	3.05	6.35	3.2	★	○
	Z111R1.75ISO	Z111L1.75ISO	1.75	3.05	6.35	3.2	★	○
	Z111R2.0ISO	Z111L2.0ISO	2.00	3.05	6.35	3.2	★	○
	Z161R0.5ISO	Z161L0.5ISO	0.50	3.52	9.525	4.0	★	○
	Z161R0.75ISO	Z161L0.75ISO	0.75	3.52	9.525	4.0	★	○
	Z161R1.0ISO	Z161L1.0ISO	1.00	3.52	9.525	4.0	★	○
	Z161R1.25ISO	Z161L1.25ISO	1.25	3.52	9.525	4.0	★	○
	Z161R1.5ISO	Z161L1.5ISO	1.50	3.52	9.525	4.0	★	○
	Z161R1.75ISO	Z161L1.75ISO	1.75	3.52	9.525	4.0	★	○
	Z161R2.0ISO	Z161L2.0ISO	2.00	3.52	9.525	4.0	★	○
	Z161R2.5ISO	Z161L2.5ISO	2.50	3.52	9.525	4.0	★	○
	Z161R3.0ISO	Z161L3.0ISO	3.00	3.52	9.525	4.0	★	○
	Z221R3.5ISO	Z221L3.5ISO	3.50	4.65	12.7	5.0	★	○
	Z221R4.0ISO	Z221L4.0ISO	4.00	4.65	12.7	5.0	★	○
	Z221R4.5ISO	Z221L4.5ISO	4.50	4.65	12.7	5.0	★	○
	Z221R5.0ISO	Z221L5.0ISO	5.00	4.65	12.7	5.0	★	○
Z221R5.5ISO	Z221L5.5ISO	5.50	4.65	12.7	5.0	★	○	
Z221R6.0ISO	Z221L6.0ISO	6.00	4.65	12.7	5.0	★	○	

★Recommended grade (always stock available) ● Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading insert



TURNING Threading Tools

Threading insert

General turning

Parting and grooving

Threading


Threading insert

General pitch thread (without end)



		Type		Basic dimensions(mm)				Recommended coating grade		
		The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG203	YBG205
External thread	55°	Z16ERA55	Z16ELA55	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★	○
		Z16ERG55	Z16ELG55	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★	○
		Z16ERAG55	Z16ELAG55	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★	○
		Z22ERN55	Z22ELN55	3.5-5.0(7-5)	4.65	12.7	5.0	55°	★	○
	60°	Z16ERA60	Z16ELA60	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★	○
		Z16ERG60	Z16ELG60	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★	○
		Z16ERAG60	Z16ELAG60	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★	○
		Z22ERN60	Z22ELN60	3.5-5.0(7-5)	4.65	12.7	5.0	60°	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

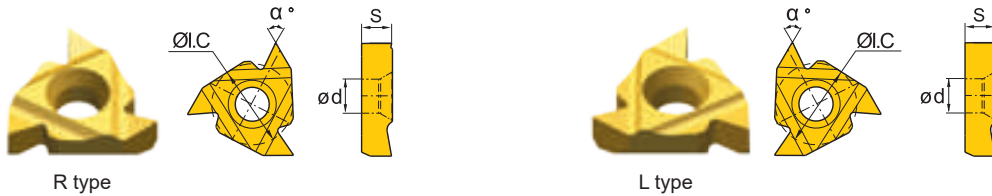



		Type		Basic dimensions(mm)				Recommended coating grade		
		The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG203	YBG205
Internal thread	55°	Z11IRA55	Z11ILA55	0.5-1.5(48-16)	3.05	6.35	3.2	55°	★	○
		Z16IRA55	Z16ILA55	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★	○
		Z16IRG55	Z16ILG55	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★	○
		Z16IRAG55	Z16ILAG55	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★	○
		Z22IRN55	Z22ILN55	3.5-5.0(7-5)	4.65	12.7	5.0	55°	★	○
	60°	Z11IRA60	Z11ILA60	0.5-1.5(48-16)	3.05	6.35	3.2	60°	★	○
		Z16IRA60	Z16ILA60	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★	○
		Z16IRG60	Z16ILG60	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★	○
		Z16IRAG60	Z16ILAG60	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★	○
		Z22IRN60	Z22ILN60	3.5-5.0(7-5)	4.65	12.7	5.0	60°	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order




Whitworth thread (with end)

ISO 228/1:1982,
DIN 259, B.S.84:1956
Tolerance class: Medium class A

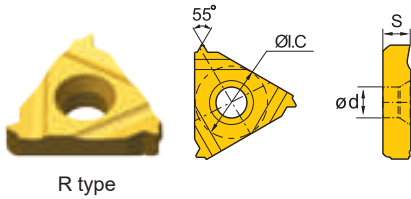


R type

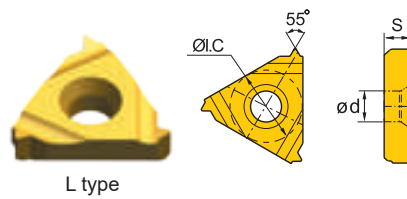


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER8W	Z16EL8W	8	3.52	9.525	4.0	★	○
	Z16ER9W	Z16EL9W	9	3.52	9.525	4.0	★	○
	Z16ER10W	Z16EL10W	10	3.52	9.525	4.0	★	○
	Z16ER11W	Z16EL11W	11	3.52	9.525	4.0	★	○
	Z16ER12W	Z16EL12W	12	3.52	9.525	4.0	★	○
	Z16ER14W	Z16EL14W	14	3.52	9.525	4.0	★	○
	Z16ER16W	Z16EL16W	16	3.52	9.525	4.0	★	○
	Z16ER18W	Z16EL18W	18	3.52	9.525	4.0	★	○
	Z16ER19W	Z16EL19W	19	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

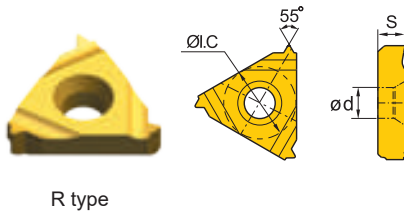

R type

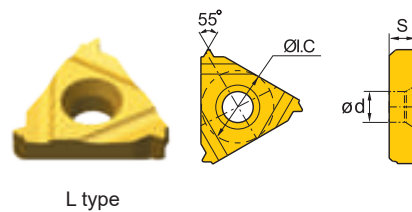

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z16IR8W	Z16IL8W	8	3.52	9.525	4.0	★	○
	Z16IR9W	Z16IL9W	9	3.52	9.525	4.0	★	○
	Z16IR10W	Z16IL10W	10	3.52	9.525	4.0	★	○
	Z16IR11W	Z16IL11W	11	3.52	9.525	4.0	★	○
	Z16IR12W	Z16IL12W	12	3.52	9.525	4.0	★	○
	Z16IR14W	Z16IL14W	14	3.52	9.525	4.0	★	○
	Z16IR16W	Z16IL16W	16	3.52	9.525	4.0	★	○
	Z16IR18W	Z16IL18W	18	3.52	9.525	4.0	★	○
	Z16IR19W	Z16IL19W	19	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading insert



TURNING Threading Tools

Threading insert

General turning



Parting and grooving

Threading


Threading insert

Unified thread (with end)

ASME B1.1-1989
Tolerance class: 2A/2B

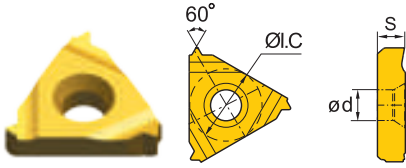


R type

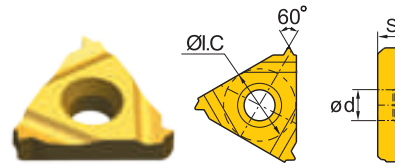


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER8UN	Z16EL8UN	8	3.52	9.525	4.0	★	○
	Z16ER10UN	Z16EL10UN	10	3.52	9.525	4.0	★	○
	Z16ER12UN	Z16EL12UN	12	3.52	9.525	4.0	★	○
	Z16ER14UN	Z16EL14UN	14	3.52	9.525	4.0	★	○
	Z16ER16UN	Z16EL16UN	16	3.52	9.525	4.0	★	○
	Z16ER18UN	Z16EL18UN	18	3.52	9.525	4.0	★	○
	Z16ER20UN	Z16EL20UN	20	3.52	9.525	4.0	★	○
	Z16ER24UN	Z16EL24UN	24	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order

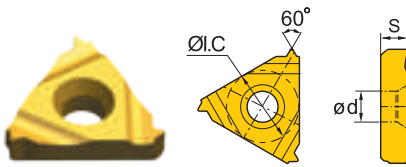

R type

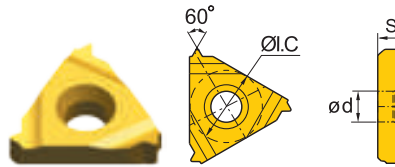

L type




	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z16IR8UN	Z16IL8UN	8	3.52	9.525	4.0	★	○
	Z16IR10UN	Z16IL10UN	10	3.52	9.525	4.0	★	○
	Z16IR12UN	Z16IL12UN	12	3.52	9.525	4.0	★	○
	Z16IR14UN	Z16IL14UN	14	3.52	9.525	4.0	★	○
	Z16IR16UN	Z16IL16UN	16	3.52	9.525	4.0	★	○
	Z16IR18UN	Z16IL18UN	18	3.52	9.525	4.0	★	○
	Z16IR20UN	Z16IL20UN	20	3.52	9.525	4.0	★	○
	Z16IR24UN	Z16IL24UN	24	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order





British standard taper piper thread (with end)

ISO 7/1:1994
B.S.21:1985
Standard BSPT

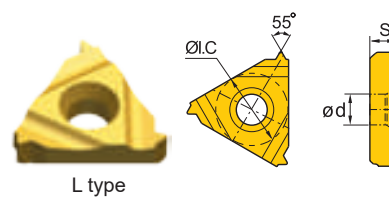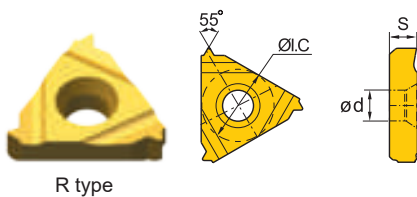

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER11BSPT	Z16EL11BSPT	11	3.52	9.525	4.0	★	○
	Z16ER14BSPT	Z16EL14BSPT	14	3.52	9.525	4.0	★	○
	Z16ER19BSPT	Z16EL19BSPT	19	3.52	9.525	4.0	★	○
	Z16ER28BSPT	Z16EL28BSPT	28	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

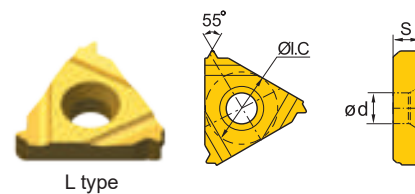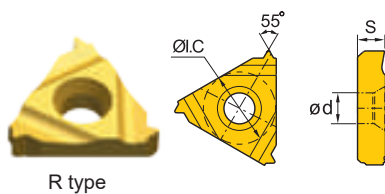

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z16IR11BSPT	Z16IL11BSPT	11	3.52	9.525	4.0	★	○
	Z16IR14BSPT	Z16IL14BSPT	14	3.52	9.525	4.0	★	○
	Z16IR19BSPT	Z16IL19BSPT	19	3.52	9.525	4.0	★	○
	Z16IR28BSPT	Z16IL28BSPT	28	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading insert



TURNING Threading Tools

Threading insert

General turning



Parting and grooving

Threading


Threading insert

American standard taper pipe thread (with end)

ASME B1.20.1-1983
Standard NPT

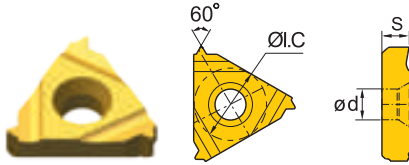


R type

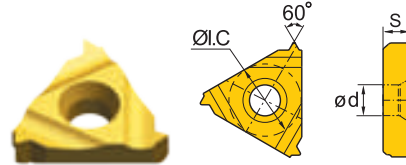


L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
External thread	Z16ER8NPT	Z16EL8NPT	8	3.52	9.525	4.0	★	○
	Z16ER11.5NPT	Z16EL11.5NPT	11.5	3.52	9.525	4.0	★	○
	Z16ER14NPT	Z16EL14NPT	14	3.52	9.525	4.0	★	○
	Z16ER18NPT	Z16EL18NPT	18	3.52	9.525	4.0	★	○
	Z16ER27NPT	Z16EL27NPT	27	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order

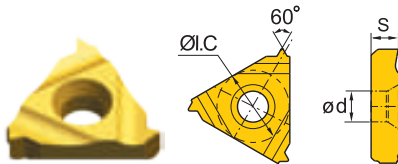

R type

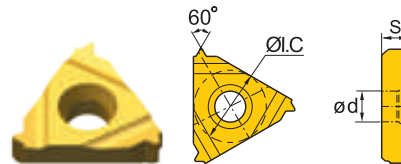

L type

	Type		Basic dimensions(mm)				Recommended coating grade	
	The right hand tools	The left hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG203	YBG205
Internal thread	Z16IR8NPT	Z16IL8NPT	8	3.52	9.525	4.0	★	○
	Z16IR11.5NPT	Z16IL11.5NPT	11.5	3.52	9.525	4.0	★	○
	Z16IR14NPT	Z16IL14NPT	14	3.52	9.525	4.0	★	○
	Z16IR18NPT	Z16IL18NPT	18	3.52	9.525	4.0	★	○
	Z16IR27NPT	Z16IL27NPT	27	3.52	9.525	4.0	★	○

★Recommended grade (always stock available) ● Available grade (always stock available) ○ Make-to-order



Threading inserts code key

Cutting direction

R > Right rotation L > Left rotation

Insert shape



T

Other

Z

22 > Indicates that the inner cutting circle diameter of the blade is 12.7

16 > Indicates that the inner cutting circle diameter of the blade is 9.525

11 > Indicates that the inner cutting circle diameter of the blade is 6.35

Number of cutting edge teeth

01 > Number of teeth per cutting edge

Cutting Type

W > External thread cutting inserts

N > Internal thread cutting inserts

R T 16. 01 W- 3.00 GM (B)

Pitch

Full tooth shape
(pitch range is indicated by numbers)

mm	TPI
0.35-9.0	72-2

V-tooth
(pitch range is indicated by letter)

	mm	TPI
A	0.5-1.5	48-16
AG	0.5-3.0	48-8
G	1.75-3.0	14-8
N	3.5-5.0	7-5
Q	5.5-6.0	4 1/2-4

Threaded tooth shape

GM	ISO metric 60° thread
60	60° general pitch thread
55	55° general pitch thread
W	Whitworth thread
UN	Unified thread
BSPT	British standard pipe thread
NPT	American standard pipe thread

Supplementary number

B > Thin Threaded Inserts

TURNING Threading Tools

Threading tools

General turning

Parting and grooving


Threading

Threading tools


ISO metric thread (with end) **Thin type**

ISO 965-1980, DIN 13, GB/T 197-2003

Tolerance class: 6g/6H



R type

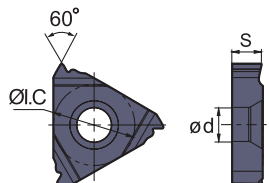


	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm	S	ØI.C	ød	YBG202
External thread	RT16.01W-0.50GMB	0.50	3.52	9.525	4.0	★
	RT16.01W-0.75GMB	0.75	3.52	9.525	4.0	★
	RT16.01W-1.00GMB	1.00	3.52	9.525	4.0	★
	RT16.01W-1.25GMB	1.25	3.52	9.525	4.0	★
	RT16.01W-1.50GMB	1.50	3.52	9.525	4.0	★
	RT16.01W-1.75GMB	1.75	3.52	9.525	4.0	★
	RT16.01W-2.00GMB	2.00	3.52	9.525	4.0	★
	RT16.01W-2.50GMB	2.50	3.52	9.525	4.0	★
	RT16.01W-3.00GMB	3.00	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type



	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm	S	ØI.C	ød	YBG202
Internal thread	RT16.01N-0.50GMB	0.50	3.52	9.525	4.0	★
	RT16.01N-0.75GMB	0.75	3.52	9.525	4.0	★
	RT16.01N-1.00GMB	1.00	3.52	9.525	4.0	★
	RT16.01N-1.25GMB	1.25	3.52	9.525	4.0	★
	RT16.01N-1.50GMB	1.50	3.52	9.525	4.0	★
	RT16.01N-1.75GMB	1.75	3.52	9.525	4.0	★
	RT16.01N-2.00GMB	2.00	3.52	9.525	4.0	★
	RT16.01N-2.50GMB	2.50	3.52	9.525	4.0	★
	RT16.01N-3.00GMB	3.00	3.52	9.525	4.0	★



★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



General pitch thread (without end) **Thin type**



R type



		Type	Basic dimensions(mm)				Recommended coating grade	
		The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG202
External thread	60°	RT16.01W-A60B	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★
		RT16.01W-G60B	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★
		RT16.01W-AG60B	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★
	55°	RT16.01W-A55B	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★
		RT16.01W-G55B	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★
		RT16.01W-AG55B	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning



Parting and grooving

Threading

Threading tools



R type



		Type	Basic dimensions(mm)				Recommended coating grade	
		The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	α°	YBG202
Internal thread	60°	RT16.01N-A60B	0.5-1.5(48-16)	3.52	9.525	4.0	60°	★
		RT16.01N-G60B	1.75-3.0(14-8)	3.52	9.525	4.0	60°	★
		RT16.01N-AG60B	0.5-3.0(48-8)	3.52	9.525	4.0	60°	★
	55°	RT16.01N-A55B	0.5-1.5(48-16)	3.52	9.525	4.0	55°	★
		RT16.01N-G55B	1.75-3.0(14-8)	3.52	9.525	4.0	55°	★
		RT16.01N-AG55B	0.5-3.0(48-8)	3.52	9.525	4.0	55°	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

A TURNING Threading Tools

Threading tools

General turning

Parting and grooving


Threading

Threading tools


Whitworth thread (with end) **Thin type**

ISO 228/1:1982, DIN 259, B.S.84:1956

Tolerance class: Medium class A



R type




	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
External thread	RT16.01W-8WB	8	3.52	9.525	4.0	★
	RT16.01W-9WB	9	3.52	9.525	4.0	★
	RT16.01W-10WB	10	3.52	9.525	4.0	★
	RT16.01W-11WB	11	3.52	9.525	4.0	★
	RT16.01W-12WB	12	3.52	9.525	4.0	★
	RT16.01W-14WB	14	3.52	9.525	4.0	★
	RT16.01W-16WB	16	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type




	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
Internal thread	RT16.01N-8WB	8	3.52	9.525	4.0	★
	RT16.01N-9WB	9	3.52	9.525	4.0	★
	RT16.01N-10WB	10	3.52	9.525	4.0	★
	RT16.01N-11WB	11	3.52	9.525	4.0	★
	RT16.01N-12WB	12	3.52	9.525	4.0	★
	RT16.01N-14WB	14	3.52	9.525	4.0	★
	RT16.01N-16WB	16	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order




Unified thread (with end) **Thin type**

ASME B1.1-1989
Tolerance class: 2A/2B



R type




	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
External thread	RT16.01W-8UNB	8	3.52	9.525	4.0	★
	RT16.01W-10UNB	10	3.52	9.525	4.0	★
	RT16.01W-12UNB	12	3.52	9.525	4.0	★
	RT16.01W-14UNB	14	3.52	9.525	4.0	★
	RT16.01W-16UNB	16	3.52	9.525	4.0	★
	RT16.01W-18UNB	18	3.52	9.525	4.0	★
	RT16.01W-20UNB	20	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type



	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
Internal thread	RT16.01N-8UNB	8	3.52	9.525	4.0	★
	RT16.01N-10UNB	10	3.52	9.525	4.0	★
	RT16.01N-12UNB	12	3.52	9.525	4.0	★
	RT16.01N-14UNB	14	3.52	9.525	4.0	★
	RT16.01N-16UNB	16	3.52	9.525	4.0	★
	RT16.01N-18UNB	18	3.52	9.525	4.0	★
	RT16.01N-20UNB	20	3.52	9.525	4.0	★
	RT16.01N-24UNB	24	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading tools

TURNING Threading Tools

Threading tools

General turning


Parting and grooving

Threading


Threading tools

British standard taper pipe thread (with end) **Thin type**

ISO 7/1:1994,B.S.21:1985
Standard BSPT



R type




	Type	Basic dimensions(mm)				Recommended coating grade
		Pitch/mm (pitch/Inch)	S	ØI.C	ød	
	The right hand tools					YBG202
External thread	RT16.01W-11BSPTB	11	3.52	9.525	4.0	★
	RT16.01W-14BSPTB	14	3.52	9.525	4.0	★
	RT16.01W-19BSPTB	19	3.52	9.525	4.0	★
	RT16.01W-28BSPTB	28	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type




	Type	Basic dimensions(mm)				Recommended coating grade
		Pitch/mm (pitch/Inch)	S	ØI.C	ød	
	The right hand tools					YBG202
Internal thread	RT16.01N-11BSPTB	11	3.52	9.525	4.0	★
	RT16.01N-14BSPTB	14	3.52	9.525	4.0	★
	RT16.01N-19BSPTB	19	3.52	9.525	4.0	★
	RT16.01N-28BSPTB	28	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order




American standard taper pipe thread (with end) **Thin type**

ASME B1.20.1-1983
Standard NPT



R type




	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
External thread	RT16.01W-8NPTB	8	3.52	9.525	4.0	★
	RT16.01W-11.5NPTB	11.5	3.52	9.525	4.0	★
	RT16.01W-14NPTB	14	3.52	9.525	4.0	★
	RT16.01W-18NPTB	18	3.52	9.525	4.0	★
	RT16.01W-27NPTB	27	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order



R type



	Type	Basic dimensions(mm)				Recommended coating grade
	The right hand tools	Pitch/mm (pitch/Inch)	S	ØI.C	ød	YBG202
Internal thread	RT16.01N-8NPTB	8	3.52	9.525	4.0	★
	RT16.01N-11.5NPTB	11.5	3.52	9.525	4.0	★
	RT16.01N-14NPTB	14	3.52	9.525	4.0	★
	RT16.01N-18NPTB	18	3.52	9.525	4.0	★
	RT16.01N-27NPTB	27	3.52	9.525	4.0	★

★Recommended grade (always stock available) ●Available grade (always stock available) ○Make-to-order

General turning

Parting and grooving

Threading

Threading tools

A TURNING Threading Tools

Threading tools

Threading tools code key

General turning
Parting and grooving
Threading

Threading tools

Clamping system

Top clamping Screw clamping

ZC **ZS**

Thread type

I > Internal thread
E > External thread

Cutting direction

Right hand Left hand

R **L**

ZS E R 20 20 K 16

Nose height

Note: 00 for round tool holder.
Only to integer, for example:
h=8mm is labeled as 08.

Shank width

Note: Diameter for round tool holder
for example: b=8mm is labeled as 08.

Tool length


Code	H	K	M	P	Q	R	S	T	U
Length	100	125	150	170	180	200	250	300	350

Insert size


Code	11	16	22
Triangle side length	11	16	22
Inscribed circle	6.35	9.525	12.70



External threading tools

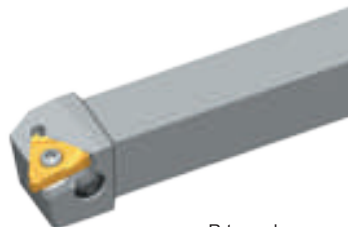

R-type shown

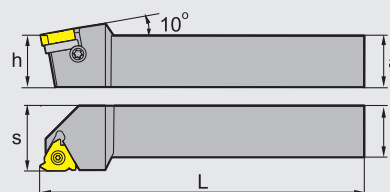

Type	Stock	Basic dimensions(mm)					Applicable inserts	Inserts screw	Shim	Shim screw	Wrench	
		a	h	b	L	s						
ZSER	1616H16	▲	16	16	16	100						
	2020K16	▲	20	20	20	125						25
	2525M16	▲	25	25	25	150						32
	3225P16	▲	32	32	25	170						32
	3232P16	▲	32	32	32	170						40
	2525M22	▲	25	25	25	150						32
	3225P22	▲	32	32	25	170						32
	3232P22	▲	32	32	32	170						40
4040S22	△	40	40	40	250	50						
ZSEL	1616H16	▲	16	16	16	100						
	2020K16	▲	20	20	20	125						25
	2525M16	▲	25	25	25	150						32
	3225P16	▲	32	32	25	170						32
	3232P16	▲	32	32	32	170						40
	2525M22	▲	25	25	25	150						32
	3225P22	▲	32	32	25	170						32
	3232P22	▲	32	32	32	170						40
4040S22	△	40	40	40	250	50						

▲ Stock available

△ Make-to-order


General turning

Parting and grooving


Threading

Threading tools

Internal threading tools

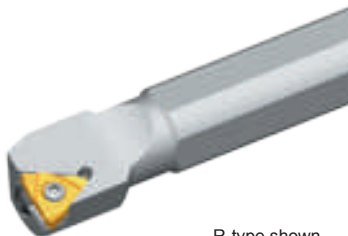

R-type shown

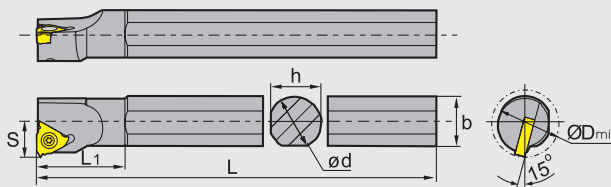

Type	Stock	Basic dimensions(mm)							Applicable inserts	Inserts screw	Shim	Shim screw	Wrench	
		d	L	b	D _{min}	s	h	L ₁						
ZSIR	0016K11	▲	16	125	15.5	12	10	15	20.9	Z11IR□□□□	I60 M2.5X6.5T	---	---	WT08IP
	0016M11	▲	16	150	16	16	10.5	15	25.9					
	0016M16	▲	16	150	15.5	20	12	15	27	Z16IR□□□□	I60 M3.5X08TT	---	---	WT15IP
	0020M16	▲	20	150	19	25	14	18	28.7					
	0020Q16	▲	20	180	19	25	14	18	34	Z22IR□□□□	I60 M3.5X12TT	MT16-□□MN	SM4X8C	WT20IP
	0025M16	▲	25	150	24	32	17	23	28.8					
	0032R16	▲	32	200	31	40	22	30	30.9	Z22IR□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0032S16	▲	32	250	31	40	22	30	30.9					
	0040T16	▲	40	300	38.5	50	27	37	31.5	Z22IR□□□□	I60 M5×13.2	---	---	WT20IP
	0050U16	▲	50	350	48.5	63	35	49	40.2					
	0020Q22	▲	20	180	19	25	15	18	35	Z22IR□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0025R22	▲	25	200	24	32	19	23	39					
	0032S22	▲	32	250	31	40	22	30	36.4	Z22IR□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0040T22	▲	40	300	38.5	50	27	37	37.2					
0050U22	▲	50	350	48.5	63	35	47	42.6	Z22IR□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	
ZSIL	0016K11	▲	16	125	15.5	12	10	15	20.9	Z11IL□□□□	I60 M2.5X6.5T	---	---	WT07IP
	0016M11	▲	16	150	16	16	10.5	15	25.9					
	0016M16	▲	16	150	16	20	12	15	27	Z16IL□□□□	I60 M3.5X08TT	---	---	WT15IP
	0020M16	▲	20	150	19	25	14	18	28.7					
	0020Q16	▲	20	180	19	25	14	18	34	Z22IL□□□□	I60 M3.5X12TT	MT16-□□MN	SM4X8C	WT15IP
	0025M16	▲	25	150	24	32	17	23	28.8					
	0032R16	▲	32	200	31	40	22	30	30.9	Z22IL□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0032S16	▲	32	250	31	40	22	30	30.9					
	0040T16	▲	40	300	38.5	50	27	37	31.5	Z22IL□□□□	I60 M5×13.2	---	---	WT20IP
	0050U16	▲	50	350	48.5	63	35	49	40.2					
	0020Q22	▲	20	180	19	25	15	18	35	Z22IL□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0025R22	▲	25	200	24	32	19	23	39					
	0032S22	▲	32	250	31	40	22	30	36.4	Z22IL□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP
	0040T22	▲	40	300	38.5	50	27	37	37.2					
0050U22	▲	50	350	48.5	63	35	47	42.6	Z22IL□□□□	I60 M4×15X	MT22-□□MN	SM5X8.5	WT20IP	


▲Stock available △Make-to-order

Please follow the following steps to get the best threading result:


- 1 Select proper thread machining method.
- 2 Define helical angle and select shim.
- 3 Select proper insert and tool holder size.
- 4 By checking reference table of standard threading programs, select feasible cutting parameters.
- 5 Select feed way.

Machining method of threading tools


External threading machining (Right thread)

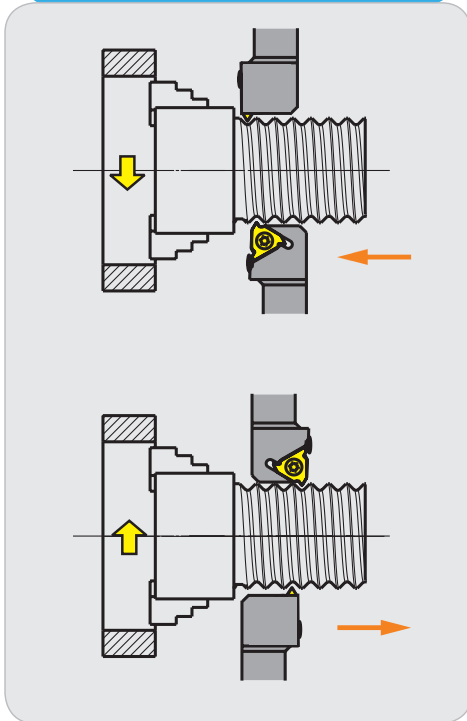


External threading machining (Left thread)

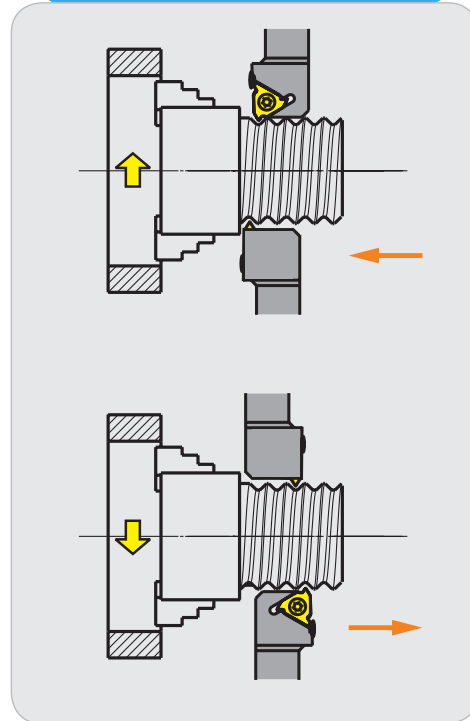

Internal threading machining (Right thread)

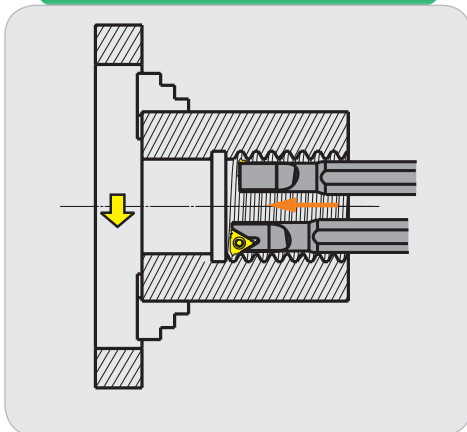

Internal threading machining (Left thread)

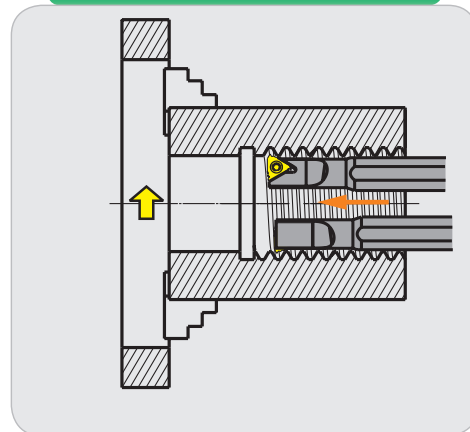



TURNING Threading Tools

Application information of threading

Decide helical angle and select shim

The clearance angle of threading inserts is actually along the edge (flank). This has significant effect on heat diffusion, spread of abrasion as well as tool life, security and pitch quality. The clearance angle of threading pitch on clearance face is determined by thread helical angle. These two angles are similar to each other to some extent. If inclined angle of insert is different from the helical angle, then the clearance angle won't be the same either.

The helical angle of pitch has to be the same with the inclined angle of insert to prevent over wearing on the clearance face which could affect tool life. the helical angle is calculated as below:

$$e = \arctan \frac{p}{d_2 \times \pi}$$

P= Pitch

d₂= pitch diameter

The most common inclined angle is 1°. MT standard shim and its inclined angle is also 1°.

Calculation of clearance angle:

Clearance angle is calculated as below:

$$\beta = \arctan (\tan \theta \times \tan \alpha)$$

2θ=Thread profile angle

α=The rake angle of external standard threading tools is 10°; the rake angle of internal standard threading tools is 15°.

The shim has to be changed when helical angle of thread is ≤ clearance angle of tool, which could cause intervene on insert flank.


Please change the shim to adjust the difference between helical angle of thread and inclined angle of shim to be within 2°~0°.

For example: when P=1.5, d₂=24mm, helical angle 1.14°-(2°~0°)=inclined angle (-0.86°~1.14°) it is feasible to use standard shim 1°.

Shim specification table is as follows:

Screw pitch range	Insert dimensions	Inclined angle	Shim
0.5-3.0	16	0	MT16-00MN
		1	MT16-01MN
		2	MT16-02MN
		3	MT16-03MN
3.5-6.0	22	0	MT22-00MN
		1	MT22-01MN
		2	MT22-02MN
		3	MT22-03MN


Note: the standard angle of shim for our threading tools is 1°. ((MT16-01MN or MT22-01MN))

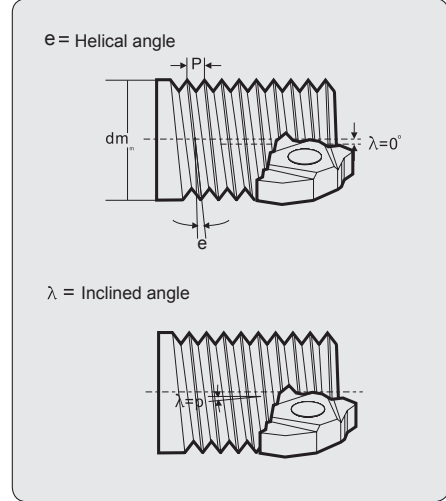

Please refer to the table below for actual value:

Thread profile angle 2θ	β	
	External thread	Internal thread
60°	5.8°	8.79°
55°	5.24°	7.94°
30°	2.7°	4.1°
29°	2.6°	3.96°

Select shim:

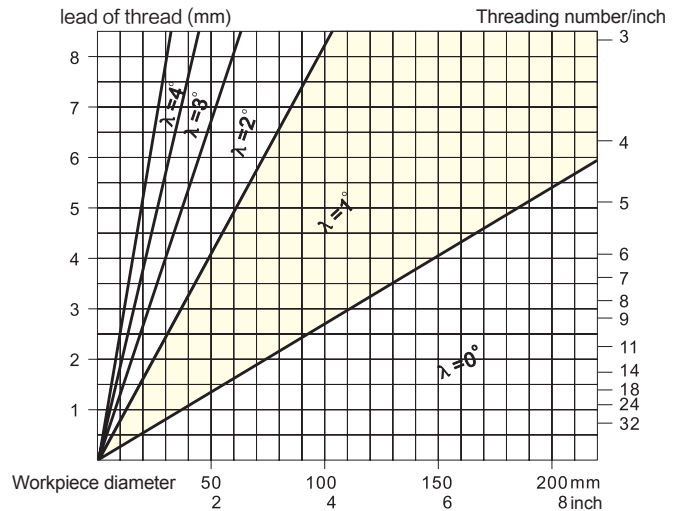



Select proper inserts and size of tool holder (Please refer to detailed table of threading tools and inserts)

Parameter table for threading program under different standards

Table of recommended in-feed for metric ISO external threading with wiper edge

Screw pitch	1.0	1.25	1.5	1.75	2.0	2.5	3.0	4.0	5.0
Total in-feed	0.72	0.86	1.02	1.17	1.33	1.63	1.94	2.58	3.21
Number of passes	5	6	7	8	9	11	13	15	17
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)								
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.20/-	0.20/-	0.21/-	0.22/-	0.24/-	0.25/-	0.26/-	0.35/-	0.40/-
2	0.18/0.10	0.18/0.10	0.18/0.10	0.20/0.12	0.22/0.13	0.24/0.14	0.24/0.14	0.30/0.17	0.35/0.20
3	0.16/0.09	0.14/0.09	0.18/0.10	0.18/0.10	0.20/0.12	0.21/0.12	0.20/0.12	0.25/0.14	0.30/0.17
4	0.10/0.06	0.10/0.08	0.15/0.09	0.15/0.09	0.15/0.09	0.18/0.10	0.20/0.12	0.20/0.12	0.28/0.16
5	0.08/-	0.08/0.06	0.12/0.07	0.13/0.08	0.12/0.07	0.15/0.09	0.18/0.10	0.18/0.10	0.25/0.14
6			0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.18/0.10	0.20/0.12
7			0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.13/0.08	0.16/0.09	0.18/0.10
8				0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.15/0.09	0.16/0.09
9					0.08/-	0.10/0.06	0.10/0.06	0.15/0.09	0.15/0.09
10						0.08/0.05	0.10/0.06	0.13/0.08	0.15/0.09
11						0.08/-	0.08/0.06	0.12/0.07	0.13/0.08
12							0.08/0.05	0.12/0.07	0.13/0.08
13								0.11/0.06	0.12/0.07
14								0.10/0.06	0.12/0.07
15								0.08/-	0.11/0.06
16									0.10/0.06
17									0.08/-

General turning

Parting and grooving

Threading

Application information of threading



TURNING Threading Tools

Application information of threading

■ Table of recommended in-feed for metric ISO internal threading with wiper edge

Screw pitch	1.00	1.25	1.5	1.75	2.0	2.5	3.0	4.0	5.0
Total in-feed	0.62	0.77	0.92	1.06	1.21	0.15	1.79	2.36	2.95
Number of passes	5	6	7	8	9	11	13	15	17
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)								
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.18/-	0.20/-	0.22/-	0.23/-	0.24/-	0.25/-	0.26/-	0.30/-	0.32/-
2	0.14/0.08	0.15/0.09	0.16/0.09	0.16/0.09	0.18/0.10	0.20/0.12	0.20/0.12	0.25/0.14	0.28/0.16
3	0.12/0.07	0.12/0.07	0.14/0.08	0.14/0.08	0.15/0.09	0.15/0.09	0.20/0.12	0.22/0.13	0.25/0.14
4	0.10/0.06	0.12/0.07	0.12/0.07	0.13/0.08	0.14/0.08	0.15/0.09	0.18/0.10	0.20/0.12	0.22/0.13
5	0.08/-	0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.13/0.08	0.15/0.09	0.18/0.10	0.21/0.12
6			0.09/0.05	0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.20/0.12
7			0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.18/0.10
8				0.08/-	0.09/0.05	0.10/0.06	0.10/0.06	0.15/0.09	0.18/0.10
9					0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.15/0.09
10						0.09/0.05	0.10/0.06	0.12/0.07	0.15/0.09
11						0.08/-	0.10/0.06	0.12/0.07	0.15/0.09
12							0.08/0.05	0.11/0.06	0.15/0.09
13								0.11/0.06	0.12/0.07
14								0.10/0.06	0.11/0.06
15								0.08/-	0.10/0.06
16									0.10/0.06
17									0.08/-

General turning

Parting and grooving

Threading

Application information of threading



Table of recommended in-feed for American unified standard external threading with wiper edge

Screw pitch	24	20	18	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.649	0.779	0.866	0.974	1.113	1.299	1.416	1.558	1.731	1.948	2.226	2.597	3.116
Number of passes	5	6	6	7	9	9	10	11	12	13	14	15	16
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.206 / —	0.210 / —	0.233 / —	0.226 / —	0.196 / —	0.229 / —	0.220 / —	0.214 / —	0.210 / —	0.211 / —	0.213 / —	0.218 / —	0.229 / —
2	0.148 / 0.086	0.163 / 0.094	0.181 / 0.104	0.188 / 0.109	0.189 / 0.110	0.222 / 0.128	0.228 / 0.132	0.240 / 0.139	0.256 / 0.148	0.276 / 0.160	0.304 / 0.176	0.343 / 0.198	0.399 / 0.230
3	0.114 / 0.066	0.125 / 0.072	0.139 / 0.080	0.145 / 0.083	0.146 / 0.084	0.170 / 0.098	0.176 / 0.102	0.184 / 0.106	0.196 / 0.113	0.212 / 0.122	0.234 / 0.135	0.263 / 0.152	0.306 / 0.177
4	0.096 / 0.055	0.105 / 0.061	0.117 / 0.068	0.122 / 0.070	0.123 / 0.071	0.143 / 0.083	0.148 / 0.086	0.155 / 0.090	0.165 / 0.095	0.179 / 0.103	0.197 / 0.114	0.222 / 0.128	0.258 / 0.149
5	0.085 / 0.049	0.093 / 0.054	0.103 / 0.059	0.107 / 0.062	0.108 / 0.062	0.126 / 0.073	0.131 / 0.075	0.137 / 0.079	0.146 / 0.084	0.158 / 0.091	0.173 / 0.100	0.195 / 0.113	0.227 / 0.131
6		0.084 / 0.048	0.093 / 0.054	0.097 / 0.056	0.098 / 0.056	0.114 / 0.066	0.118 / 0.068	0.124 / 0.072	0.132 / 0.076	0.142 / 0.082	0.157 / 0.091	0.177 / 0.102	0.205 / 0.119
7				0.089 / 0.052	0.090 / 0.052	0.105 / 0.061	0.109 / 0.063	0.114 / 0.066	0.121 / 0.070	0.131 / 0.076	0.144 / 0.083	0.163 / 0.094	0.189 / 0.109
8					0.084 / 0.048	0.098 / 0.056	0.101 / 0.058	0.106 / 0.061	0.113 / 0.065	0.122 / 0.070	0.134 / 0.078	0.151 / 0.087	0.176 / 0.101
9						0.079 / 0.045	0.092 / 0.053	0.095 / 0.055	0.100 / 0.057	0.106 / 0.061	0.114 / 0.066	0.126 / 0.073	0.142 / 0.082
10								0.090 / 0.052	0.094 / 0.054	0.100 / 0.058	0.108 / 0.063	0.119 / 0.069	0.156 / 0.090
11									0.090 / 0.052	0.095 / 0.055	0.103 / 0.059	0.113 / 0.065	0.149 / 0.086
12										0.091 / 0.053	0.098 / 0.057	0.108 / 0.063	0.142 / 0.082
13											0.094 / 0.054	0.104 / 0.060	0.136 / 0.079
14												0.100 / 0.058	0.131 / 0.076
15													0.109 / 0.063
16													0.122 / 0.071

General turning

Parting and grooving

Threading

Application information of threading

A TURNING Threading Tools

Application information of threading

Table of recommended in-feed for American unified standard internal threading with wiper edge

Screw pitch	24	20	18	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.573	0.687	0.764	0.860	0.982	1.146	1.250	1.375	1.528	1.719	1.964	2.291	2.750
Number of passes	5	6	6	7	8	9	9	10	11	12	13	14	15
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.193 / —	0.200 / —	0.222 / —	0.219 / —	0.220 / —	0.228 / —	0.250 / —	0.247 / —	0.246 / —	0.252 / —	0.262 / —	0.278 / —	0.302 / —
2	0.127 / 0.073	0.239 / 0.081	0.155 / 0.089	0.161 / 0.093	0.173 / 0.100	0.190 / 0.110	0.207 / 0.120	0.216 / 0.125	0.229 / 0.132	0.247 / 0.142	0.271 / 0.156	0.304 / 0.176	0.353 / 0.204
3	0.098 / 0.056	0.107 / 0.062	0.119 / 0.069	0.124 / 0.072	0.132 / 0.076	0.146 / 0.084	0.159 / 0.092	0.166 / 0.096	0.176 / 0.101	0.189 / 0.109	0.208 / 0.120	0.234 / 0.135	0.271 / 0.156
4	0.082 / 0.048	0.090 / 0.052	0.100 / 0.058	0.104 / 0.060	0.112 / 0.064	0.123 / 0.071	0.134 / 0.077	0.140 / 0.081	0.148 / 0.086	0.160 / 0.092	0.175 / 0.101	0.197 / 0.114	0.228 / 0.132
5	0.073 / 0.042	0.079 / 0.046	0.088 / 0.051	0.092 / 0.053	0.098 / 0.057	0.108 / 0.062	0.118 / 0.068	0.123 / 0.071	0.130 / 0.075	0.141 / 0.081	0.1543 / 0.089	0.173 / 0.100	0.201 / 0.116
6		0.072 / 0.041	0.080 / 0.046	0.083 / 0.048	0.089 / 0.051	0.098 / 0.056	0.107 / 0.062	0.111 / 0.064	0.118 / 0.068	0.127 / 0.073	0.140 / 0.081	0.157 / 0.091	0.182 / 0.105
7				0.077 / 0.044	0.082 / 0.047	0.090 / 0.052	0.098 / 0.057	0.102 / 0.059	0.108 / 0.063	0.117 / 0.067	0.128 / 0.074	0.144 / 0.083	0.167 / 0.097
8					0.076 / 0.044	0.084 / 0.048	0.091 / 0.053	0.095 / 0.055	0.101 / 0.058	0.109 / 0.063	0.119 / 0.069	0.134 / 0.078	0.156 / 0.090
9						0.079 / 0.045	0.086 / 0.050	0.090 / 0.052	0.095 / 0.055	0.102 / 0.059	0.112 / 0.065	0.126 / 0.073	0.146 / 0.084
10								0.085 / 0.049	0.090 / 0.052	0.097 / 0.056	0.106 / 0.061	0.119 / 0.069	0.138 / 0.080
11									0.085 / 0.049	0.092 / 0.053	0.101 / 0.058	0.113 / 0.065	0.131 / 0.076
12										0.088 / 0.051	0.096 / 0.056	0.108 / 0.063	0.126 / 0.073
13											0.092 / 0.053	0.101 / 0.060	0.121 / 0.070
14												0.100 / 0.058	0.116 / 0.067
15													0.112 / 0.065

General turning

Parting and grooving

Threading

Application information of threading

Table of recommended in-feed for British standard internal and external threading with wiper edge

Screw pitch	28	20	19	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.581	0.813	0.856	1.017	1.162	1.355	1.479	1.626	1.807	2.033	2.324	2.711	3.253
Number of passes	5	6	6	8	8	9	9	10	11	12	14	15	16
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.179 / —	0.211 / —	0.223 / —	0.196 / —	0.223 / —	0.226 / —	0.246 / —	0.236 / —	0.230 / —	0.255 / —	0.195 / —	0.197 / —	0.204 / —
2	0.134 / 0.070	0.172 / 0.089	0.181 / 0.094	0.186 / 0.097	0.213 / 0.111	0.234 / 0.122	0.255 / 0.133	0.226 / 0.139	0.282 / 0.147	0.304 / 0.158	0.322 / 0.167	0.361 / 0.189	0.421 / 0.219
3	0.104 / 0.054	0.132 / 0.069	0.139 / 0.072	0.143 / 0.074	0.163 / 0.085	0.180 / 0.093	0.197 / 0.102	0.206 / 0.106	0.216 / 0.113	0.233 / 0.121	0.247 / 0.128	0.278 / 0.145	0.323 / 0.168
4	0.087 / 0.045	0.111 / 0.058	0.117 / 0.061	0.120 / 0.063	0.138 / 0.072	0.151 / 0.079	0.165 / 0.086	0.172 / 0.090	0.182 / 0.095	0.197 / 0.102	0.208 / 0.108	0.234 / 0.122	0.272 / 0.142
5	0.077 / 0.040	0.098 / 0.051	0.103 / 0.054	0.106 / 0.055	0.121 / 0.063	0.133 / 0.069	0.145 / 0.076	0.152 / 0.079	0.161 / 0.084	0.1738 / 0.090	0.183 / 0.095	0.207 / 0.108	0.240 / 0.125
6		0.089 / 0.046	0.093 / 0.049	0.096 / 0.050	0.110 / 0.057	0.121 / 0.063	0.131 / 0.068	0.137 / 0.071	0.145 / 0.076	0.157 / 0.082	0.166 / 0.086	0.187 / 0.097	0.217 / 0.113
7				0.088 / 0.046	0.101 / 0.052	0.111 / 0.058	0.121 / 0.063	0.126 / 0.066	0.134 / 0.070	0.144 / 0.075	0.152 / 0.079	0.172 / 0.089	0.200 / 0.104
8				0.082 / 0.043	0.093 / 0.049	0.103 / 0.054	0.113 / 0.059	0.117 / 0.061	0.124 / 0.065	0.134 / 0.070	0.142 / 0.074	0.160 / 0.083	0.186 / 0.097
9						0.097 / 0.050	0.106 / 0.055	0.110 / 0.057	0.117 / 0.061	0.126 / 0.066	0.133 / 0.069	0.150 / 0.078	0.174 / 0.091
10								0.104 / 0.054	0.111 / 0.058	0.119 / 0.062	0.126 / 0.066	0.142 / 0.074	0.165 / 0.086
11									0.105 / 0.055	0.113 / 0.059	0.120 / 0.062	0.135 / 0.070	0.157 / 0.082
12										0.108 / 0.056	0.114 / 0.060	0.129 / 0.067	0.150 / 0.078
13											0.110 / 0.055	0.124 / 0.064	0.144 / 0.075
14												0.119 / 0.062	0.138 / 0.072
15													0.115 / 0.060
16													0.129 / 0.067

General turning

Parting and grooving

Threading

Application information of threading

■ Table of recommended in-feed for NPT internal and external threading with wiper edge

Screw pitch	27	18	14	11.5	8
Total in-feed	0.75	1.129	1.451	1.767	2.54
Number of passes	6	8	10	12	14
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)				
	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.19/-	0.22/-	0.240/-	0.24/-	0.255/-
2	0.15/0.087	0.181/0.104	0.200/0.115	0.208/0.120	0.250/0.144
3	0.13/0.075	0.152/0.088	0.170/0.098	0.182/0.105	0.245/0.141
4	0.11/0.063	0.141/0.081	0.150/0.086	0.168/0.097	0.230/0.133
5	0.09/0.052	0.131/0.075	0.140/0.081	0.155/0.089	0.210/0.121
6	0.08/0.46	0.121/0.070	0.130/0.075	0.145/0.084	0.195/0.112
7		0.101/0.058	0.120/0.069	0.138/0.079	0.180/0.104
8		0.082/0.047	0.110/0.063	0.124/0.072	0.175/0.101
9			0.100/0.058	0.117/0.067	0.170/0.098
10			0.091/0.052	0.105/0.060	0.155/0.089
11				0.095/0.055	0.140/0.080
12				0.090/0.052	0.125/0.072
13					0.110/0.063
14					0.100/0.058

■ Table of recommended in-feed for BSPT internal and external threading with wiper edge

Screw pitch	28	19	14	11
Total in-feed	0.581	0.856	1.162	1.479
Number of passes	5	6	8	10
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)			
	X/Z	X/Z	X/Z	X/Z
1	0.179/-	0.223/-	0.222/-	0.214/-
2	0.134/0.070	0.181/0.094	0.213/0.111	0.242/0.126
3	0.103/0.054	0.139/0.072	0.163/0.085	0.186/0.097
4	0.087/0.045	0.117/0.061	0.138/0.072	0.157/0.082
5	0.078/0.040	0.103/0.054	0.121/0.063	0.138/0.072
6		0.093/0.049	0.110/0.057	0.125//0.065
7			0.101/0.052	0.115/0.060
8			0.094/0.049	0.107/0.056
9				0.100/0.052
10				0.095//0.049



Table of recommended cutting parameters

ISO	Material		Unit cutting force Kc0.4 N/mm ²	Hardness HB	Grade	
					YBG202 YBG203 YBG205	
Cutting speed(m/min)						
P	Carbon steel	C=0.15%	1900	125	150-175	
		C=0.35%	2100	150	140-155	
		C=0.60%	2250	200	130-145	
	Alloy steel	Anneal	2100	180	110-130	
		Hardened	2600	275	80-100	
		Hardened	2700	300	70-90	
		Hardened	2850	350	60-80	
	High alloy steel	Anneal	2600	200	90-115	
		Hardened	3900	325	70-90	
	Cast steel	Non-alloy	2000	180	180-210	
low alloy		2500	200	90-115		
High alloy		2700	225	90-115		
Martensite steel 12%Mn		3600	250	40-50		
M	Stainless steel	Austenite	2450	180	110-130	
		Martensite/Ferrite	2300	200	130-170	
K	Malleable cast iron	Ferrite	1100	130	110-140	
		Pearlite	1100	230	85-105	
	Gray cast iron	Low tensile-strength	1100	180	110-140	
		High tensile-strength	1500	260	90-115	
Nodular cast iron	Ferrite	1100	160	110-130		
	Pearlite	1800	250	80-100		
N	Al alloy	Non-aging treatment	500	60	1300-1450	
		Aging treatment	800	100	450-500	
	Cast aluminum alloy	Non-aging treatment	750	75	430-470	
Aging treatment		900	90	250-290		
S	Heat resistant alloy	Iron base	Anneal	3000	200	35-50
			Aging	3050	280	25-35
		Ni- or Co-base	Anneal	3500	250	15-25
			Aging	4150	350	10-20
Casting	4150	320	10-15			
H	Hardened steel	Hardened steel	4500	HRC55	40-50	

General turning

Parting and grooving

Threading

Application information of threading

Note: •The values in the above table are range values. High values in the range could be considered in actual cutting. When trying new cutting speed, please check the cutting edge condition before operation.
 •In stainless steel threading, high cutting speed should be used to prevent built-up edge.
 •The cutting parameters should be reduced when cutting small pitch thread and when using tools with small nose radius.
 •When cutting thread by tools with small nose radius, such as NPT standard thread, it is advisable to use tools with big nose radius first to rough, so as to improve the life of tools with small nose radius.




In-feed way of threading tools

- General turning
- Parting and grooving
- Threading

Application information of threading



Radial in-feed

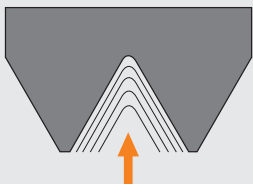


- Easy operating, high general.
- V-shape chip caused by long chip steel workpiece will produce big bend stress on cutting edge.
- It requires low cutting depth, sharp cutting edge and good tough material.
- Big quantity of heat when cutting ,V-shape chip is hard to control.
- Because the interface of cutting chips on the right and left side is long, so it is easy to cause vibration and make the cutting edge suffer more overloading.

Flank in-feed




- Cutting edge suffer small bend stress, stable estate, it is easy for chips formation in deep cutting depth.
- There are enough space to leave chips flow when flank in-feed.
- Big abrasion on right flank.

Modified flank in-feed

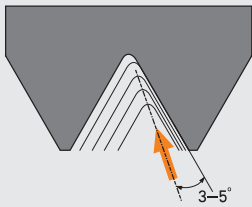

- Right Cutting Edge also engage on cutting depth to a certain extent, it can reduce the abrasion on right side of clearance face.
- Cutting edge suffer small bend stress, stable estate, it is easy for chips formation in deep cutting depth.
- Good Cutting Performance.

Alternate flank in-feed

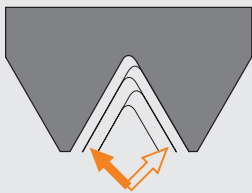

- Cutting edge trade off when machining, equality abrasion on left and right side of clearance face on cutting edge, it can improve the life of tools.
- Chips are flowing from both of right and left side, good chips flowing.
- Recommend using in big screw-pitch thread cutting.

! Recommend adopting flank in-feed or alternate flank in-feed under allowable range of machining equipment or programmer, it can eliminate the machining vibration effectively, and it has enough space discharge the chips between pitch. Cutting edge suffer a small stress, machining stable, it likes the general turning process when machining thread, good chip control without extra chips.



Common problems in threading and solutions

Problem	Cause	Solutions
Wear on clearance face	Cutting speed too high.	Reduce cutting speed.
	Low cutting depth, abrasion.	Reduce frequency of feed and friction of cutting edge.
	Inserts are over the center line.	Adopt correct center height.
Asymmetric wear on right and left cutting edge	The inclined angle of insert is different from the helical angle of thread.	Change to proper shim to get correct inclined angle.
	Flank in-feed is not correct.	Change the way of flank in-feed.
Breakage	Cutting speed too low.	Increase cutting speed.
	Cutting force too high.	Increase frequency of feed and reduce Max in-feed.
	Unstable clamping.	Check if workpiece vibrates. Reduce overhang of tool. Verify clamping of workpiece and tool.
	Chip twisting.	Increase the pressure of cooling liquid to blow away chips.
Plastic deformation	High cutting speed, high temperature on cutting area.	Reduce cutting speed. Increase feed frequency and reduce Max cutting depth.
	Insufficient cooling fluid.	Increase cooling fluid supply.
Low thread surface quality	Cutting speed too low. The insert is over the center line. Chips are not under control.	Increase cutting speed. Adjust centre height. Change the operation way of tools to well control chips.
Incorrect profile	Incorrect center height.	Adjust centre height.
	Pitch on machine is not correct.	Adjust machine.
Shallow profile	Cutting speed set wrong.	Adjust cutting depth.
Surface damage	Chips involved or contacted.	Change to flank in-feed to control chip flow direction.
Built-up edge	Temperature of cutting edge is too low. Usually occur when machining stainless steel and low carbon steel.	Increase cutting speed as well as pressure and concentration of cooling fluid. Choose inserts with good toughness.
Crack on surface	Cutting force too high	Reduce the cutting depth of each feed.
Vibration	Incorrect clamping of workpiece or tool	Verify clamping of workpiece and tool. Minimize overhang of tool.
	Incorrect cutting parameters	Increase cutting speed or reduce it substantially.
	Incorrect tool clamping	Adjust center height.


General turning

Parting and grooving

Threading

Application information of threading



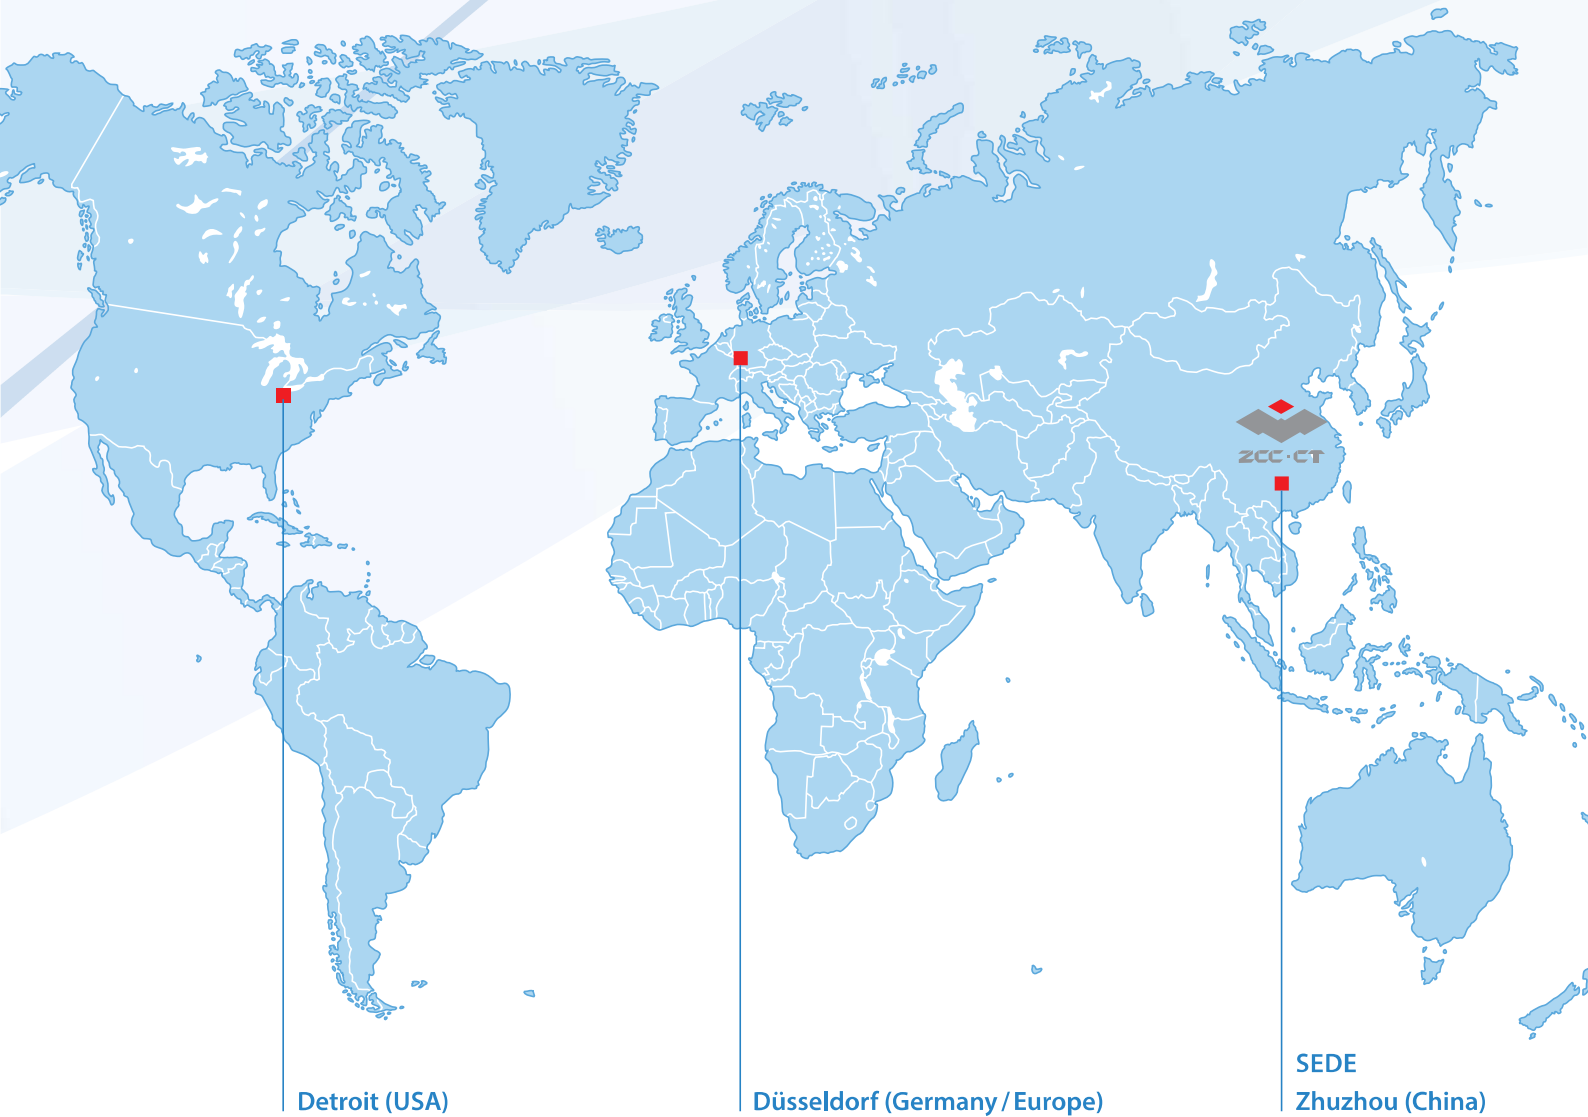

Detroit (USA)

Düsseldorf (Germany / Europe)

SEDE
Zhuzhou (China)





Oficina central europea

ZCC Cutting Tools Europe GmbH

www.zcct-europe.com

Wanheimer Str. 57, 40472 Düsseldorf, Germany

Tel.: +49 (0)211-989240-0

Fax: +49 (0)211-989240-111

E-mail: info@zcct-europe.com

Sucursal de Francia

ZCC Cutting Tools Europe GmbH

Succursale Française

www.zcct-europe.com

14, Allée Charles Pathé, 18000 Bourges, France

Tel.: +33 (0)2 45 41 01 40

Fax: +33 (0)800 74 27 27

E-mail: ventes@zcct-europe.com